

A

LIMBACH & LIMBACH L.L.P.
2001 Ferry Building, San Francisco, CA 94111
415/433-4150

Address to:

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Attorney's Docket No. SONY-P9488

[S99P0488US00]

First Named Inventor CHIAKI NONAKA

UTILITY PATENT APPLICATION TRANSMITTAL
(under 37 CFR 1.53(b))

SIR:

Transmitted herewith for filing is the patent application entitled:
RECORDING APPARATUS AND METHOD, AND REPRODUCING APPARATUS AND METHOD

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date April 23, 1999, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL151574584US addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Howard Wong

(Name of person mailing paper)

(Signature)

Enclosed are:

1. ☒ Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
 - i. 46 Pages of specification (including claims and abstract);
 - ii. 9 Sheets of drawings.

☐ formal ☒ informal
3. Declaration or oath
 - a. ☒ Unsigned

ACCOMPANYING APPLICATION PARTS

4. ☐ An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
 - i. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
5. ☒ Power of Attorney (unsigned)
6. ☐ An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of ☐ references.
7. ☐ Preliminary Amendment.
8. ☒ Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
9. ☐ Other

10. FOREIGN PRIORITY

[x] Priority of application nos. P10-124915 and P10-124920 both filed on May 7, 1998 in Japan are claimed under 35 USC 119.

The certified copies of the priority applications:

- ☒ are filed herewith; or
☐ has been filed in prior application no. ☐ filed on ☐ or
☐ will be provided.

☐ English Translation Document (if applicable)

jc525 U.S. PTO
04/23/99

jc594 U.S. PTO
09/298515
04/23/99

09/298515 04/23/99

11. FEE CALCULATION

- a. ☐ Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee (\$760)
Total Claims	17 - 20	* 0	x \$18.00	0
Independent Claims	6 - 3	* 3	x \$78.00	234.00
<input type="checkbox"/> Multiple dependent claim(s), if any			\$260.00	0

*If less than zero, enter "0".

Filing Fee Calculation \$994.00

50% Filing Fee Reduction (if applicable) \$

12. Small Entity Status

- a. ☐ A small entity statement is enclosed.
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ is no longer claimed.

13. Other Fees

- ☐ Recording Assignment [\$40.00] \$0
☐ Other fees
Specify _____ \$0

Total Fees Enclosed \$994.00

14. Payment of Fees

- ☒ Check(s) in the amount of \$ 994.00 enclosed.
☐ Charge Account No. 12-1420 in the amount of \$____.
A duplicate of this transmittal is attached.

15. All correspondence regarding this application should be forwarded to the undersigned attorney:

Charles P. Sammut
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
Telephone: 415/433-4150
Facsimile: 415/433-8716

16. Authorization to Charge Additional Fees


- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. A duplicate of this transmittal is attached.

LIMBACH & LIMBACH L.L.P.

April 23, 1999
(Date)

Attorney Docket No. SONY-P9488
[S99P0488US00]

By:


Mark A. Dalla Valle
Registration No. 34,147
Attorney(s) or Agent(s) of Record

TITLE OF THE INVENTION

Recording Apparatus and Method, and Reproducing Apparatus and Method

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an apparatus for, and a method of, recording data to a disc having formed thereon alternately a track of which both walls are wobbled at a predetermined frequency and a track of which both walls are flat, and an apparatus for, and a method of, reproducing data recorded on the disc.

2. Description of Related Art

Optical discs in which program data, video data, audio data or the like is recorded are represented by compact discs (CD), for example.

Recently, it is expected that a medium appears into which the user can record a program data, video data, audio data, etc.

Currently, a mini disc (MD) is known to which a compressed audio signal can be recorded. The MD has a recording capacity as small as 140 MB and so it is suitably usable for recording audio data. However, this recording capacity is insufficient for recording video data and computer data.

In these situations, an magneto-optical disc has newly been proposed which has a recording capacity of 640 MB. This new disc is called "MD-DATA2" disc.

In the conventional MD, grooves wobbled at a frequency of 22.05 kHz are pre-formed on the disc and an address information is recorded as modulated at

22.05 kHz.

In the newly proposed MD-DATA2 to which the present invention is applied, a wobbled groove and non-wobbled groove are formed alternately as shown in FIG. 1 and data is recorded on a land between the wobbled and non-wobbled grooves.

As shown in FIG. 2, there are formed on the MD-DATA2 disc a first land TrA of which one lateral face is wobbled at a predetermined frequency while the other lateral face is flat and a second land TrB of which one lateral face is flat while the other lateral face is wobbled at a predetermined frequency.

Namely, there has not ever been proposed any MD in which data is recorded on two tracks having different physical properties.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a recording apparatus and method, and a reproducing apparatus and method, in which during write of data on two tracks different in physical properties from each other, a time of switching between the two tracks in pair is controlled.

The above object can be attained by providing a recording method in which data is written to a disc having formed thereon a pair of concentrical or spiral tracks adjacent to each other and to which a common address is given, comprising, according to the present invention, the steps of:

writing a data blocked to a predetermined length to one of the pair of tracks;

accessing the other track having the common address after the write of the data blocked to the predetermined length to the one track; and

writing a data blocked to a new predetermined length to the other one of the pair of tracks after the access to that track.

Also, the above object can be attained by providing a recording apparatus adapted to write data to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising, according to the present invention:

means for blocking an input data to a predetermined length;

means for writing the blocked data to the disc; and

means for controlling the recording means to access one of the pair of tracks and write the blocked data to the track, and then access the other one of the pair of tracks that has the common address after the write to the one track and write a data blocked to a new predetermined length to the other track.

The above object can be attained also by providing a recording apparatus adapted to write data to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising, according to the present invention:

a memory means for storing an input data once at a first transfer rate;

a memory controlling means for detecting when the data amount stored in the memory means has exceeded a first predetermined value, reading out data from

the memory means at a second transfer rate higher than the first transfer rate and stopping the data read-out from the memory means when the data amount stored in the memory means has reached a second predetermined value smaller than the first predetermined value;

a writing means for writing data read out from the memory means;

a recording means movement controlling means for moving, while the data read-out from the memory means is being stopped, the writing means from one of the pair of tracks to which the data read out from the memory means has been written to the other one of the pair of tracks; and

a writing means controlling means for stopping the writing means from writing while the data read-out from the memory means is being stopped.

Further, the above object can be attained by providing a reproducing apparatus adapted to read data from a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising, according to the present invention:

means for reading data from the disc;

a memory means for storing the data read out from the memory means once at a first transfer rate;

a memory controlling means for detecting when the data amount stored in the memory means has exceeded a first predetermined value, reading out data from the memory means at a second transfer rate higher than the first transfer rate and

stopping the data storage into the memory means when the data amount stored in the memory means has reached a second predetermined value smaller than the first predetermined value; and

a writing means movement controlling means for moving, while the data storage into the memory means is being stopped, the reading means from one of the pair of tracks from which the data has been read to the other one of the pair of tracks.

These objects and other objects, features and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic illustration of a magneto-optical disc according to the present invention, showing the shapes of tracks formed on the disc;

FIG. 2 is a schematic illustration of the magneto-optical disc according to the present invention, showing the shapes of tracks formed on the disc;

FIG. 3 is also a schematic illustration of the magneto-optical disc according to the present invention, showing the shape of a laser beam focused on the track on the disc;

FIG. 4 is a schematic block diagram of a recording and/or reproducing apparatus according to the present invention;

FIG. 5 is a schematic illustration of a first embodiment of the recording method according to the present invention;

FIG. 6 is a flow chart of recording operations in the first embodiment of the recording method according to the present invention;

FIG. 7 is a schematic illustration of a variant of the first embodiment of the recording method according to the present invention;

FIG. 8 is a schematic block diagram of a second embodiment of the present invention;

FIG. 9 is a flow chart of track changing operations during recording in the second embodiment of the present invention;

FIG. 10 is a flow chart of track changing operations in the recording method according to the present invention; and

FIG. 11 is a flow chart of track changing operations in the reproducing method according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

For the convenience of the illustration and description of the present invention, the description of an embodiment of magneto-optical disc drive unit to which the present invention is applied will be divided into the following sections:

1. Magneto-optical disc to which the present invention is applied
2. Magneto-optical disc drive unit to which the present invention is applied

3. First embodiment of the present invention
4. Second embodiment of the present invention
1. Magneto-optical disc to which the present invention is applied

As a recording medium, a magneto-optical disc adopting the so-called MD-DATA2 format is used in the magneto-optical disc drive unit for the purpose of describing the present invention.

FIG. 1 shows the shape of a recording track formed on the magneto-optical disc, and FIG. 2 shows a view, enlarged in scale, of a portion A, in FIG. 1, of the recording track on the magneto-optical disc. The magneto-optical disc 1 is a disc-shaped recording medium of about 64 mm in diameter and 1.2 mm in thickness and in which data is recorded by the magneto-optical recording method.

The magneto-optical disc 1 adopting the MD-DATA2 format to which the present invention is applied has a recording density improved by reducing the recording track pitch to 0.95 μm (1.6 μm in the magneto-optical disc adopting the conventional MD-DA (digital and audio) format.

The magneto-optical disc 1 has formed on a recording surface thereof a spiral land and groove from the lead-in to lead-out area. In this magneto-optical disc 1, the land is a recording track on which data is recorded.

Also, in this magneto-optical disc 1, the track has a so-called double-spiral form. Namely, a pair of two parallel-disposed lands being the recording tracks is spirally formed on the recording surface of the magneto-optical disc 1.

In the magneto-optical disc 1, because the wobbled groove WG is thus formed, a wobble signal can be detected from a wobbled groove with less crosstalk with a wobble signal from other wobbled grooves WG and the recording track pitch can be reduced.

Note that the recording tracks TrA and TrB to which a same address information is given are discriminated from each other as will be described below:

Namely, for discrimination of the recording track TrA from TrB, it suffices to use two side beams for detection of a wobble signal in addition to a main beam for data write or read with respect to the magneto-optical disc 1 as shown by way of example in FIG. 3.

When a beam spot SPS of the main beam is on a predetermined recording track, beam spots SPs1 and SPs2 of the two side beams, respectively, are focused on a groove adjacent to the recording track.

For example, when the beam spot SPS of the main beam is on the recording track TrA, the beam spot SPs1 of the side beam at the lead-out side is focused on the wobbled groove WG while the beam spot SPs2 of the side beam at the lead-in side is focused on the non-wobbled groove NWG.

On the other hand, when the beam spot SpS of the main beam is on the recording track TrB, the beam spot SPs1 of the side beam at the lead-out side is focused on the non-wobbled groove NWG while the beam spot SPs2 of the side beam at the lead-in side is focused on the wobbled groove WG.

That is, in the magneto-optical disc 1, the beam spots SPs1 and SPs2 of the two side beams are focused on either the wobbled groove WG and non-wobbled groove NWG or on the non-wobbled groove NWG and wobbled groove WG, respectively, depending upon whether the beam spot SPS of the main beam is focused on the recording track TrA or TrB.

Thus, the recording tracks TrA and TrB on the magneto-optical disc 1, to which a same address information is given in common, can be discriminated from each other by judging whether any of the beam spots SPs1 and SPs2 of the side beams is focused on the wobbled groove WG (or non-wobbled groove NWG).

A laser light having a wavelength λ of 650 nm is focused onto the recording track on the magneto-optical disc 1 through an objective lens of 0.52 in numerical aperture (NA). Data is recorded on the recording track at a transfer rate of 589 kB /s and at a constant linear velocity of 2.0 m/s. Data is recorded in a bit length of 0.29 μ m on the recording track.

Also, data is recorded on the recording track on the magneto-optical disc 1 by the 1-7RLL (run length limited) modulation method, RS-PC (Reed-Solomon - product code) error correction method and the block deinterleaving method. As a result, the magneto-optical disc 1 has a redundancy of 19.7% and thus a total recording capacity of about 650 MB.

In the magneto-optical disc 1, one address area recorded as the wobbled groove WG forms one sector. Each such sector is formed at every about 6.9 mm

along the recording track.

In the magneto-optical disc 1, recording areas for 16 sectors form one cluster. A data in one error correction code (ECC) block is recorded in each such cluster.

Therefore, a data in one ECC block which is a unit for data rewrite is recorded in one cluster in the magneto-optical disc 1 for matching between the physical address and data amount to be recorded. Note that in the magneto-optical disc 1, the data amount in one ECC block is 32,768 bytes.

The specifications of the magneto-optical disc 1 are collectively shown in Table 1.

Table 1

Disc diameter	64 mm
Disc thickness	1.2 mm
Track pitch	0.95 μm
Bit length	0.39 $\mu\text{m/bit}$
$\lambda \cdot \text{NA}$	650 nm \cdot 0.52
Recording method	On-land recording
Addressing method	Interlaced addressing (one wobbling of double spiral)
Modulation method	RLL(1, 7)
Error correction method	RS-PC
Interleaving	Block
Redundancy	19.7%
Linear velocity	2.0 m/s
Data rate	589 kB/s

Recording capacity	650 MB
--------------------	--------

The magneto-optical disc 1 specified as in Table 1 can record data at a high density. For example, data compressed by the MPEG (Moving Picture coding Experts Group) 2 can be recorded into this magneto-optical disc 1 for a time of 15 to 17 min.

2. Magneto-optical disc drive unit to which the present invention is applied

The magneto-optical disc drive unit to which the present invention is applied to write and/or read data to and/or from the aforementioned magneto-optical disc 1, will be described herebelow.

FIG. 4 is a schematic block diagram of the magneto-optical disc drive unit to which the present invention is applied. The magneto-optical disc drive unit is generally indicated with a reference 2. The magneto-optical disc drive unit 2 comprises a magnetic head 11 to give a modulating magnetic field to the magneto-optical disc 1, an optical head 12 to emit a laser light to the magneto-optical disc 1 for data write or read to or from the magneto-optical disc 1, and a spindle motor 13 to drive to spin the magneto-optical disc 1.

The magneto-optical disc drive unit 2 further comprises, in its recording system, a data input circuit 14, ID (identification) code/EDC (error detecting coding) encoder 15, ECC (error correction encoding) encoder 16, memory 17, modulator 18 and a magnetic field modulation drive 19.

The magneto-optical disc drive unit 2 further comprises, in its reproducing system, an RF amplifier 21, RF signal modulator 22, ID decoder 23, memory 24, ECC decoder 25, EDC decoder 26 and a data output circuit 27.

Further, the magneto-optical disc drive unit 2 comprises a servo controller 28 in its servo system.

Moreover, the magneto-optical disc drive unit 2 comprises an ADIP (address in pre-groove) decoder 29 to detect a wobble signal recorded as wobbled groove n the magneto-optical disc 1 in order to detect a physical address information on the magneto-optical disc 1, and also a system controller 30 to control the recording and reproducing systems, servo controller 28, etc.

For data recording, the magneto-optical disc drive unit 2 constructed as in the above functions as will be described below:

The magneto-optical disc drive unit 2 is supplied, from an external equipment such as a camera, video tape recorder, satellite broadcasting step top box (STB), etc. for example, with a data to be written to the magneto-optical disc 1. The to-be-recorded data is supplied to the data input circuit 14, and then to the ID/EDC encoder 15 from the data input circuit 14.

In the ID/EDC encoder 15, an ID information of the to-be-recorded data supplied to the ID/EDC encoder 15 and an error detecting code (EDC) for detecting an error in the supplied to-be-recorded data are added to the supplied to-be-recorded data.

The to-be-recorded data having the ID information and EDC added thereto is supplied to the ECC decoder 16 in which an error correction code is added in a predetermined error correction block to the supplied to-be-recorded data. The to-be-recorded data having the ECC added thereto is stored once into the memory 17.

In the memory 17, the to-be-recorded data stored in the memory 17 is subjected to absorption of a time gap due to a difference between a transfer rate at which the to-be-recorded data has been transferred from an external device to the magneto-optical disc drive unit 2 and a rate at which the data is to be written to the magneto-optical disc 1, and then supplied to the modulator 18.

The modulator 18 modulates the supplied to-be-recorded data by a predetermined modulation method. The modulated to-be-recorded data is supplied to the magnetic field modulation driver 19.

The magnetic field modulation driver 19 drives, correspondingly to the supplied to-be-recorded data, the magnetic head 11 to magneto-optically write the supplied data to the recording track on the magneto-optical disc 1.

For data recording, the magneto-optical disc drive unit 2 functions as will be described below:

In the magneto-optical disc drive unit 2, the optical head 12 reads a data recorded on the recording track on the magneto-optical disc 1, and supplies a read signal to the RF amplifier 21 in which the signal read from the magneto-optical disc 1 is amplified and otherwise processed, and then supplied to the RF signal

demodulator 22.

The RF signal demodulator 22 effects a binary coding, demodulation and other processing of the read signal to reproduce a data. The reproduced data generated by the RF signal demodulator 22 is stored once into the memory 24. The reproduced data generated by the RF signal demodulator 22 is supplied to the ID decoder 23 as well. The ID decoder 23 detects an ID information from the reproduced data. The detected ID information is stored along with the reproduced data indicated by the ID information once into the memory 24.

In the memory 24, the reproduced data stored in the memory 24 is subjected to absorption of a time gap due to a difference between a rate at which the data has been read from the magneto-optical disc 1 and a transfer rate at which the data is to be transferred from the magneto-optical disc drive unit 2 to an external device, and then supplied to the ECC decoder 25. The ECC decoder 25 corrects the reproduced data based on the ECC added in the predetermined error correction block. The error-corrected reproduced data is supplied to the EDC decoder 26 which detects an error in the reproduced data based on the EDC added to the reproduced data. The reproduced data having an error detected therein is supplied to the data output circuit 27. The data output circuit 27 supplies the reproduced data to an external device such as a camera, video tape recorder, satellite broadcasting set top box (STB), etc. for example.

In the magneto-optical disc drive unit 2, the write or read operations are

servo-controlled as will be described below:

Based on the signal detected by the optical head 12, the RF amplifier 21 generates a focus error signal indicative of whether a spot of laser light emitted from the optical head 12 is focused just on the recording surface of the magneto-optical disc 1, a tracking error signal indicative of whether the laser spot is focused just on the recording track, etc. The focus error signal, tracking error signal, etc. thus generated are supplied to the servo controller 28. Based on these focus error signal, tracking error signal, etc., the servo controller 28 controls the optical head 12 so that the spot of laser light from the optical head 12 is focused just on the recording surface and recording track, respectively.

Also, the servo controller 28 controls the speed of the spindle motor 13, based on a clock, etc. obtained from a wobble signal, etc. for example, so that data can be written or read at a constant linear velocity. Further, the servo controller 28 changes or controls the power of laser light emitted from the optical head 12 so that data write or read to or from the magneto-optical disc 1 can be done with an appropriate laser power.

Further, in the magneto-optical disc drive unit 2, an address information is detected from the magneto-optical disc 1 for data write or read as will be described below:

As having previously been described, the magneto-optical disc 1 has an address information recorded on the wobbled groove WG adjacent to the recording

track (land). The RF amplifier 21 generates a so-called pushpull signal from a difference between the two side spots SPs1 and SPs2, for example.

The pushpull signal is supplied to the ADIP decoder 29 which will detect a wobble signal from the pushpull signal and decode the wobble signal to detect a physical address on the magneto-optical disc 1 to or from which data is currently written or read. The ADIP decoder 29 supplies the physical address to the system controller 30.

Also, the ADIP decoder 29 judges the polarity, etc. of the wobble signal to detect to or from which of the lead-in and lead-out recording tracks TrA and TrB formed as a so-called double spiral a data is currently being written or read.

This positional information of a recording track is supplied to the system controller 30 which is also supplied with the address information detected by the ADIP decoder 29 as having previously been mentioned.

The system controller 30 is supplied also with information such as a read start address, write start address etc. from an external device, etc.

Based on these information, the system controller 30 generates a track jump signal under which the optical head 12 is moved radially of the magneto-optical disc 1, and supplies it to the servo controller 28.

Based on this track jump signal, the servo controller 28 move the optical head 12 radially of the magneto-optical disc 1 to focus the laser light onto a recording track at a predetermined address.

3. First embodiment of the present invention

As having been described in the foregoing, the magneto-optical disc drive unit 2 can magneto-optically write a to-be-recorded supplied from an external device to the magneto-optical disc 1, and read a data from the magneto-optical disc 1 and supply it to an external device.

Next, data write to each of the recording tracks formed as the double spiral on the magneto-optical disc 1, will be described herebelow:

As mentioned in the foregoing, the magneto-optical disc 1 has the pair of parallel recording tracks TrA and TrB formed in the form of a so-called double spiral on the recording surface thereof.

In the magneto-optical disc drive unit 2, a switching point is predetermined and the lead-in side recording track TrA and lead-out side recording track TrB are switched between them at every such predetermined switching point.

More specifically, when having written data to one of the recording tracks TrA and TrB along a predetermined length thereof for 16 clusters, for example, as shown in FIG. 5, the magneto-optical disc drive unit 2 goes to the other recording track TrA or TrB.

The data amount recordable in one cluster is of 32,768 bytes which is equivalent to the data amount of one ECC block. The switching from one recording tack to the other is effected when data write has been made to a recording track length being an integral multiple of clusters. By fixing the data amount

recorded by the magneto-optical disc drive unit 2, the switching between the recording tracks TrA and TrB can be done at a predetermined position even when a plurality of different applications is written to one magneto-optical disc 1 for example. Thus, the magneto-optical disc drive unit 2 can be operated easily.

Since data is written to the magneto-optical disc 1 at a constant linear velocity, one cluster has a constant length of about $6.9 \text{ mm} \times 16$. Also, by setting a recording track length of an integral multiple of clusters to a switching point at which switching is made between the recording tracks TrA and TrB, the magneto-optical disc drive unit 2 can switch the recording track from TrA to TrB or vice versa at each fixed track length for data write or read.

Data write by the magneto-optical disc drive unit 2 to the recording track TrA or TrB as switched at every 16 clusters, will be described herebelow with reference to FIG. 6. Note that a physical address in each sector of the magneto-optical disc 1 is represented by ADD_X.

First, when a data writing operation is started, the system controller 30 designates a write start address (ADD_X) based on a control information supplied from an external device at step S1. Then, the system controller 30 gives a track jump instruction to the servo controller 28 to let the optical head 12 and magnetic head 11 make a track jump to the write start address (ADD_X) at step S2. Next, the system controller 30 moves the optical head 12 and magnetic head 11 to the lead-in side recording track TrA at the write start address (ADD_X) at step S3, and lets the

[illegible]

If the system controller 30 judges that data has not yet been written for 16 clusters, it will repeat the operations from step S5.

Then at step S8, the system controller 30 gives a track jump instruction to the servo controller 28 which will thus allow the optical head 12 and magnetic head 11 to make a track jump to the write start address (ADD_X).

20

recording track TrB from the write start address (ADD_X).

Further the system controller 30 monitors an address information detected by the ADIP decoder 29 to judge, at step S11, whether data has been written down to an address (ADD_X + 15) 16 sectors ahead of the write start address (ADD_X) to . If the system controller 30 judges that data has been written down to the address 16 sectors ahead (ADD_X + 15), namely, for one cluster, it judges, at step S12, whether data has been written for 16 clusters.

If the system controller 30 judges that data has not yet been written for 16 clusters, it will repeat the operations from step S11.

If the system controller 30 judges that data has been written for 16 clusters, that it, down to the predetermined switching position, it will control, at step S13, the optical head 12 and magnetic head 11 to stop writing data to the recording track TrB.

When data has been written to both the recording tracks TrA and TrB for 16 clusters, respectively, the system controller 30 will designate, at step S14, an address (ADD_X + 255) 16 clusters ahead of the designated address (ADD_X), and repeat the operations from step S2.

By effecting the operations ranging from steps S1 to S14, the magneto-optical disc drive unit 2 can efficiently record data to the magneto-optical disc 1, and easily discriminate the switching point for each of the recording tracks.

Thus the magneto-optical disc drive unit 2 can write data sequentially from

the lead-in (or lead-out) area on the magneto-optical disc 1. Therefore, when a predetermined amount of data has been written to the magneto-optical disc 1, a whole area outside or inside an address can be taken as a non-written area.

Thus, when an additional data is written to the magneto-optical disc 1, the data is written into the non-written area. Therefore, the magneto-optical disc drive unit 2 may not possibly write such an additional data over a data already written in the magneto-optical disc 1 to erase the existing data even if the writing position is misregistered due to a disturbance or the like when writing the additional data.

By effecting the operations ranging from steps S1 to S14, the magneto-optical disc drive unit 2 can efficiently write data to the magneto-optical disc 1, thereby improving the transfer rate for data write.

In the foregoing, data write to the recording tracks TrA and TrB switched alternately at each predetermined track length has been described. However, the switching position is not limited only to the predetermined track length. A data write to the recording tracks TrA and TrB switched alternately at each variant of track length will be described herebelow:

As shown in FIG. 7, the magneto-optical disc drive unit 2 may be adapted to write data to the recording tracks TrA and TrB, at different write start addresses, as switched alternately at each predetermined track length (for 32 clusters, for example). For example, when the write start address being a first switching position on the recording track TrA is ADD_X, the write start address being a

second switching position on the recording track TrB may be set $ADD_X + 8$, the write start address being a second switching position on the recording track TrA may be set $ADD_X + 32$, and the write start address being a second switching position on the recording track TrB may be set $ADD_X + 40$. By starting data write to a switched one of the recording tracks at a position corresponding to a predetermined position between a write start position at which data write to a recording track yet to be switched is started and a write end position at which data write to the recording track yet to be switched is ended, the time for shift between the recording tracks can be reduced relatively, thereby further improving the transfer rate for data write.

Also, the magneto-optical disc drive unit 2 may be adapted so that switching is done between the recording tracks TrA and TrB each time data has been written to a length equivalent to a predetermined radial length of the magneto-optical disc 1, for example, 200 μm . Also, the magneto-optical disc drive unit 2 may be adapted so that switching is done each time data has been written to a length equivalent to 200 turns of the recording track, for example. By setting the switching point such that it can be followed only by the tracking servo system, switching between the recording tracks TrA and TrB can be done rapidly with no load to the sled servo system.

Note that also in this case, data write to a switched one of the recording tracks TrA and TrB may be started at a position corresponding to a predetermined

position between a write start position at which data write to a recording track yet to be switched is started and a write end position at which data write to the recording track yet to be switched is ended, as shown in FIG. 7.

Further, the magneto-optical disc drive unit 2 may be adapted so that for recording audio data, switching between the recording tracks TrA and TrB is done each time a breakpoint set according to the content or the like of the data.

For example, the magneto-optical disc drive unit 2 may be adapted so that switching between the recording tracks TrA and TrB is done at every second when audio data is recorded or at every so-called sound unit when audio data compressed by the ATRAC method is recorded. For recording video data, the magneto-optical disc drive unit 2 may be adapted so that switching between the recording tracks TrA and TrB is done at every breakpoint set according to the content or the like of the video data.

For example, the magneto-optical disc drive unit 2 may be adapted so that switching between the recording tracks TrA and TrB is done at every integral multiple of the number of frames or at every so-called GOP when a video data compressed by the MPEG is recorded.

By setting a switching point based on the breakpoint of audio data and video data to be written to the magneto-optical disc 1, it is possible to easily identify the switching point even for reproducing the magneto-optical disc and edit the recorded data.

magneto-optical disc drive unit 2 of the present invention will be described herebelow:

As shown in FIG. 8, it is assumed that the bit rate of to-be-recorded data supplied continuously to the input/output buffer 4 from an external device such as a camera, video tape recorder, satellite broadcasting set top box (STB), etc. and that of reproduced data supplied continuously from the input/output buffer 4 to an external device, are a transfer rate V_b .

Also, the bit rate of data written by a disc drive 3 to the magneto-optical disc 1 and that of data reproduced by the disc drive 3 from the magneto-optical disc 1 are a write rate V_t .

It is assumed that the relation between the transfer rate V_b and write rate V_t is $V_t > V_b$.

In the magneto-optical disc drive unit 2, as the disc drive 3 starts recording, data is supplied at the transfer rate V_b to the input/output buffer 4 from an external device.

Thus, data is stored into the input/output buffer 4 at the transfer rate V_b .

When a predetermined time T_j passes from the start of data storage into the input/output buffer 4, the input/output buffer 4 will start supplying data to the disc drive 3. The data is written to the magneto-optical disc 1 at the write rate V_t .

The data amount stored in the input/output buffer 4 decreases at a rate of $V_t - V_b$, and will be zero when a time T_x passes. This relation is expressed by a

following equation (1):

$$T_j \times V_b = T_x \times (V_t - V_b) \dots\dots\dots (1)$$

This equation (1) means that if data is continuously recorded to one recording track for the time T_x , the continuous recording at the write rate V_t is assured even if the recording is stopped for the time T_j .

Since the rate V_t of write to the magneto-optical disc 1 is constant, there exists between the elapsed time T_x and number B of clusters to which data is written a constant proportional relation expressed by a following equation (2):

$$B = (T_x \times V_t)/C \dots\dots\dots (2)$$

where C : Number of bits included in one cluster.

Therefore, a relation represented by a following equation (3) can be determined from the above equations (1) and (2):

$$B = (T_j \times V_b \times V_t)/\{C \times (V_t - V_b)\} \dots\dots\dots (3)$$

A data amount X continuously recorded meets a relation expressed by a following equation (4) unless the cluster is taken in consideration:

$$X = (T_j \times V_b \times V_t)/(V_t - V_b) \dots\dots\dots (4)$$

That is, if at least B clusters or X bits or more of data are continuously recorded to one recording track, the continuous recording at the transfer rate V_b is assured even if the recording is stopped for the time T_j .

Since the magneto-optical disc 1 has a double spiral, the magneto-optical disc drive unit 2 switches the lead-in side recording track TrA and lead-out side

[illegible]

The magneto-optical disc drive unit 2 thus records data to the recording track timely selected, so that data is not unevenly recorded to one of the recording tracks but data can sequentially be recorded evenly to both the two recording tracks from the lead-in area or lead-out area of the magneto-optical disc 1.

Thus, an additional data is recorded to the magneto-optical disc 1, it is written to this non-written area.

In the magneto-optical disc drive unit 2, after a number of clusters of data, meeting the relation (3), is continuously written to one of the recording tracks, switching is made between the tracks TrA and TrB, thereby assuring the continuity of a data supplied from an external device to the input/output buffer 4.

28

the rate V_b by making a selection between the recording tacks TrA and TrB after more clusters of data than defined by the equation (3) are recorded to one recording track taking it in account that the time T_j is required for shift from one to the other recording track.

Therefore, in the magneto-optical disc drive unit 2, data can be supplied at a higher data rate from an external device to the disc drive 3, so that an application requiring a high data rate, for example, an moving picture data or the like, can be recorded on the real-time basis.

Taking account of the time T_j for shift from one to the other recording track, will increase the stability of the entire system.

Thus in the magneto-optical disc drive unit 2, data transferred at a first transfer rate is stored, stored data is recorded at a second transfer rate higher than the first transfer rate to a magneto-optical disc having a plurality of spiral, parallel recording tracks formed thereon, a data amount which can continuously be transferred at the first transfer rate to one of the recording tracks based on a shift time at which a track switching is made, first and second transfer rates, and then a recording track is selected for write of data to the track.

In the magneto-optical disc drive 2, switching between the plurality of parallel recording tracks is made according to the relation between the shift time, first and second transfer rates to assure a continuous data transfer at the first transfer rate, thereby recording data to all the recording tracks.

Further to accommodate a data for write to the magneto-optical disc 1 having some logical structure, the magneto-optical disc drive unit 2 may be adapted to make switching between the recording tracks at every logical structure of the data.

The logical structure is a field or frame when the data to be recorded is a picture data for example. It is GOP (group of picture) when the data is a picture data compressed by the MPEG. Also, it is a sound unit when the data is an audio data compressed by the so-called ATRAC (adapted transform acoustic coding) method. By switching the recording track at every logical structure of a data to be written to the magneto-optical disc 1, access to the disc 1 can be improved.

Next, switching between the recording tracks TrA and TrB by the magneto-optical disc drive unit 2 will be described herebelow with reference to the flow charts in FIGS. 9 and 10:

Note that the flow chart in FIG. 10 shows in detail steps S22 and S24 in the flow chart in FIG. 9.

When supply of data from an external device to the input/output buffer 4 is started, the controller 5 of the magneto-optical disc drive unit 2 effects operations at steps S21 to S25.

First at step S21, the controller 5 will give a control instruction to the disc drive 3 for jumping the magnetic head 11 and optical head 12 to a predetermined address (a1) on the recording track TrA.

Next at step S22, the disc drive 3 given the control instruction will record a

predetermined number of clusters ($n1$) starting at the address ($a1$) on the recording track TrA.

At this time, the controller 5 will effect operations at steps S31 to S36 in FIG. 10.

First at step S31, the controller 5 will give a data write start instruction to the disc drive 3. Then, at step S32, the controller 5 will judge whether the disc drive 3 has completed a write in each predetermined logical structure.

If the controller 5 judges that the disc drive 3 has completed the write in the predetermined logical structure, it will determine, at step S33, the write rate V_t at which the data has been written to the recording track TrA. Then at step S34, the controller 5 will determine, based on the write rate V_t , a continuous write length of a data to be written to one of the recording tracks, that is required for assuring the write rate V_t .

That is, the controller 5 determines a number of clusters defined by the equation (3). Next at step S35, the controller 5 judges whether the data amount written to the recording track TrA has reached the continuous write length.

That is, the controller judges whether more clusters than determined at step S34 have been recorded.

If the controller 5 judges that the data amount written to the recording track TrA has reached the continuous write length, it will give a write end instruction for ending data write to the recording track TrA. At this time, the number of clusters

written to the recording track TrA is n1.

Next at step S23, the controller 5 will give the disc drive 3 a control instruction for jumping the magnetic head 11 and optical head 12 to a predetermined address (a2) on the recording track TrB. The address (a2) is a one near the address (a1).

Then at step S24, the disc drive 3 given the control instruction will record a predetermined number of clusters (n2) starting at the address (a2) on the recording track TrB.

At this time, the controller 5 will effect operations at step S31 to S36 in FIG. 10.

First at step S31, the controller 5 will give the disc drive 3 a data write start instruction. At step S32, the controller 5 will judge whether the disc drive 3 has completed a write in each predetermined logical structure. If the controller 5 judges that the disc drive 3 has completed the write, it will determine, at step S33, the write date V_t at which data has been written to the recording track TrB. Next at step S34, the controller 5 will determine, based on the write rate V_t , a continuous write length of a data to be written to the recording track TrB, that is required for assuring the write rate V_t . That is, the controller 5 will determine the number of clusters defined by the equation (3).

Next at step S35, the controller 5 will judge whether the data amount written to the recording track TrA has reached the continuous write length.

That is, the controller 5 will judge whether more clusters than determined at step S34 have been written. If the controller 5 judges that the data amount written to the recording track TrB has reached the continuous write length, it will give, at step S36, a write end instruction for ending the write of data to the recording track TrB. At this time, the number of clusters written to the recording track TrB is n2.

Next at step S25, the controller 5 will add an address for the number of clusters (n1) written at step S2 to the address (a1) on the recording track TrA, and an address for the number of clusters (n2) written at step S4 to the address (a2) on the recording track TrB. Then the controller 5 will repeat the operations at step S21 and subsequent steps.

As in the above, for a magneto-optical disc 1 used in the magneto-optical disc drive unit 2, a continuous write length of write to one of the recording tracks is determined from the write rate V_t at which data has been written to the recording track and a data amount which can continuously be transferred at the write rate V_t is determined.

After writing a data longer than the continuous write length to one of the recording tracks, the magneto-optical disc drive unit 2 switches to the other recording track for further data write.

Thus, the magneto-optical disc drive unit 2 can efficiently record data to the magneto-optical disc 1 and transfer data at a higher rate from an external device to the input/output buffer 4.

Also the magento-optical disc drive unit 2 records, in a disc management area such as TOC (table of contents) for example, an information on a point of switching between the recording tracks TrA and TrB, namely, an information on linkage between the recording tracks TrA and TrB. Thus, at data reproduction, the switching point can easily be identified and a continuous data can be reproduced.

In the magento-optical disc drive unit 2, data is read from the magento-optical disc 1 at a rate higher than the write rate V_t based on the information on the point of switch between the recording tracks TrA and TrB, so that the data can surely be transferred to an external device at the transfer rate V_b .

Next, switching between the recording tracks TrA and TrB and other recording tracks in the magento-optical disc drive unit 2 of the present invention, will be described herebelow:

In the magento-optical disc drive unit 2,

In the magento-optical disc drive unit 2, when the disc drive 3 starts data writing operation, data is supplied from an external device to the input/output device 4 at the transfer rate V_b .

Thus, data is stored into the input/output buffer 4 at the data V_b . When a larger data amount than a threshold (first threshold) has been stored in the input/output buffer 4, supply of data from the input/output buffer 4 to the disc drive 3 is started, and data is written to the magento-optical disc 1 at the write rate V_t .

At this time, the data amount stored in the input/output buffer 4 decreases at a rate $(V_t - V_b)$, and finally becomes zero in a certain time.

Thus, in the magneto-optical disc drive unit 2, the data amount stored in the input/output buffer 4 is managed by the controller 5. The controller 5 stops supply of data from the input/output buffer 4 to the disc drive 3 when the data amount stored in the input/output buffer 4 becomes below a predetermined threshold (second threshold).

In the magneto-optical disc drive unit 2, since data is continuously supplied from an external device to the input/output buffer 4 even while data supply from the input/output buffer 4 to the disc drive 3 is being stopped, the data amount stored in the input/output buffer 4 increases at the rate V_b . When the predetermined amount (first threshold) of data has been stored in the input/output buffer 4, data supply from the input/output buffer 4 to the disc drive 3 is resumed and data is written to the write rate V_t to the magneto-optical disc 1.

By repeating the above operations, the magneto-optical disc drive unit 2 can assure data transfer from an external device to the input/output buffer 4, thereby permitting to avoid the breakdown of the input/output buffer 4/

In the magneto-optical disc drive unit 2, switching between the recording tracks TrA and TrB is done while data supply from the input/output buffer 4 to the disc drive 3 is being stopped. Therefore, data write to the magneto-optical disc 1 is not interfered by the switching between the recording tracks TrA and TrB, so an

efficient switching can be done between the recording tracks.

Next, track switching for data read will be described herebelow:

In the magneto-optical disc drive unit 2, the disc drive 3 drives to spin the magneto-optical disc 1 at a constant linear velocity, reads for a predetermined time, stores the read data to the input/output buffer 4 at the write rate V_t , and sends data from the input/output buffer 4 to an external device at a slower transfer rate V_b than the write rate V_t . Of course, the transfer rate at which the data is supplied from the disc drive 3 to the input/output buffer 4 depends upon the spinning speed (linear velocity) of the magneto-optical disc 1.

When the data amount stored in the input/output buffer 4 is more than a predetermined threshold (nearly full), the read from the magneto-optical disc 1 is ceased. Namely, an intermittent write is done.

In the magneto-optical disc drive unit 2, when the data amount stored in the input/output buffer 4 is greater than the predetermined value during the intermittent write mode, switching is made from one of the recording tracks to the other.

The read control will be described herebelow with reference to the flow chart in FIG. 11:

First at step S41, when a read instruction is given, data read starts at one of the spiral recording tracks on the disc (TrA, for example).

Next at step S42, data read from the magneto-optical disc 1 is stored into the input/output buffer 4.

At step S43, read data stored in the input/output buffer 4 is delivered at a slower transfer rate V_t than the write rate V_b .

At step S44, the controller 5 judges whether the data amount stored in the input/output buffer 4 is over the first threshold. If it is judged at step S44 that the data amount in the input/output buffer 4 is smaller than the first threshold, the controller 5 returns to step S42 and continues storing the read data into the input/output buffer 4.

If it is judged at step S44 that the data amount in the input/output buffer 4 is over the first threshold, read-out of data from the magneto-optical disc 1 is stopped at step S45.

Next at step S46, the magnetic head 11 and optical head 12 are jumped from one of the recording track to which data write has been done (TrA, for example) to the other recording track TrB.

At step S47, data read is awaited (namely, one track jump is repeated). At next step S48, the controller 5 will judge whether the data amount stored in the input/output buffer 4 is under the second threshold (smaller than the first threshold). If the data amount in the input/output buffer 4 is judged to be under the second threshold, the controller 5 will return to step S41 and repeat the operations at step S41 and subsequent steps.

If the controller 5 judges that the data amount in the input/output buffer 4 is larger than the second threshold, it will return to step S47 and repeat the wait for

data reading operation.

As having been described in the foregoing, in the magneto-optical disc drive unit 2, the data read from the magneto-optical disc 1 is not interfered by the switching between the recording tracks TrA and TrB, so the track switching can be done efficiently.

The embodiments of the present invention have been described in the foregoing concerning a disc drive 3 adapted to write data to a magneto-optical disc 1 having a double spiral-formed recording tracks formed thereon. However, the present invention is not limited to such a type of magneto-optical disc but is applicable to a magneto-optical disc having formed thereon spiral or circular recording tracks of which the number is not limited. Also, the present invention is applicable to a disc-shaped recording medium such as a magnetic disc or the like.

The magneto-optical disc recording apparatus and method according to the present invention are adapted to write data to all a plurality of recording tracks switched between them at every predetermined switching point. Thus, the present invention can attain an efficient data write to a magneto-optical disc having a plurality of parallel, spiral recording tracks formed thereon. Also, the present invention can identify each track switching point easily. Also for data read from a magneto-optical disc, the present invention can easily identify each track switching point and edit written data. Further, since the present invention permits to write data to a magneto-optical disc efficiently, it can also transfer to-be-written data at a

higher rate.

The magneto-optical disc drive according to the present invention, when data amount in a storage means reaches a predetermined value the data stored in the storage means is read out at a higher second rate than the first transfer rate. When the data amount in the storage means is smaller than the predetermined value, the data read-out from the storage means is stopped. While the data read-out from the storage means is being stopped, the read head is jumped from one of the pair of recording tracks to the other. Also, in the disc reproducing apparatus according to the present invention, when the data amount in the storage means is less than the predetermined value, data read from one of the recording tracks on the disc is stopped and the read head is allowed to access the other adjacent recording track while the data read is being stopped.

Thus, the present invention permits to write data to a magneto-optical disc having a plurality of parallel, spiral recording tracks formed thereon by switching the tracks efficiently. Therefore, the present invention permits to write or read data to the magneto-optical disc, and thus minimize the influence on the data transfer rate of the shift of the read head or the like from one to the other of the recording tracks.

WHAT IS CLAIMED IS:

1. A recording method in which data is written to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising the steps of:

writing a data blocked to a predetermined length to one of the pair of tracks;
accessing the other track having the common address after the write of the data blocked to the predetermined length to the one track; and
writing a data blocked to a new predetermined length to the other one of the pair of tracks after the access to that track.

2. The recording method as set forth in Claim 1, wherein one of the pair of tracks is a land of which one wall face is wobbled at a predetermined period while the other wall face is flat.

3. The recording method as set forth in Claim 2, wherein the other one of the pair of tracks is a land of which one wall face is flat while the other wall face is wobbled at a predetermined period.

4. The recording method as set forth in Claim 1, wherein the predetermined blocking length is an integral multiple of the error correction unit.

5. A recording apparatus adapted to write data to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising:

means for blocking an input data to a predetermined length;

means for writing the blocked data to the disc; and

means for controlling the recording means to access one of the pair of tracks and write the blocked data to the track, and then access the other one of the pair of tracks that has the common address after the write to the one track and write a data blocked to a new predetermined length to the other track.

6. The recording apparatus as set forth in Claim 5, further comprising:

a memory means for storing an input data once therein; and

a scale controlling means for intermittently reading out data stored in the memory means;

the memory means compensating a data entered while the reading means is being moved from one of the pair of tracks to the other one of the pair of tracks.

7. The recording apparatus as set forth in Claim 5, wherein one of the pair of tracks is a land of which one wall face is wobbled at a predetermined period while the other wall face is flat.

8. The recording apparatus as set forth in Claim 6, wherein the other one of the pair of tracks is a land of which one wall face is flat while the other wall face is wobbled at a predetermined period.

9. The recording apparatus as set forth in Claim 5, wherein the predetermined blocking length is an integral multiple of the error correction unit.

10. A recording apparatus adapted to write data to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common

address is given, comprising:

a memory means for storing an input data once at a first transfer rate;

a memory controlling means for detecting when the data amount stored in the memory means has exceeded a first predetermined value, reading out data from the memory means at a second transfer rate higher than the first transfer rate and stopping the data read-out from the memory means when the data amount stored in the memory means has reached a second predetermined value smaller than the first predetermined value;

a writing means for writing data read out from the memory means;

a recording means movement controlling means for moving, while the data read-out from the memory means is being stopped, the writing means from one of the pair of tracks to which the data read out from the memory means has been written to the other one of the pair of tracks; and

a writing means controlling means for stopping the writing means from writing while the data read-out from the memory means is being stopped.

11. The recording method as set forth in Claim 10, wherein one of the pair of tracks is a land of which one wall face is wobbled at a predetermined period while the other wall face is flat.

12. The recording method as set forth in Claim 11, wherein the other one of the pair of tracks is a land of which one wall face is flat while the other wall face is wobbled at a predetermined period.

13. A reproducing apparatus adapted to read data from a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising:

means for reading data from the disc;

a memory means for storing the data read out from the memory means once at a first transfer rate;

a memory controlling means for detecting when the data amount stored in the memory means has exceeded a first predetermined value, reading out data from the memory means at a second transfer rate higher than the first transfer rate and stopping the data storage into the memory means when the data amount stored in the memory means has reached a second predetermined value smaller than the first predetermined value; and

a writing means movement controlling means for moving, while the data storage into the memory means is being stopped, the reading means from one of the pair of tracks from which the data has been read to the other one of the pair of tracks.

14. The recording method as set forth in Claim 13, wherein one of the pair of tracks is a land of which one wall face is wobbled at a predetermined period while the other wall face is flat.

15. The recording method as set forth in Claim 14, wherein the other one of the pair of tracks is a land of which one wall face is flat while the other wall face is

wobbled at a predetermined period.

16. A recording method in which data is written to a disc having formed thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising the steps of:

storing an input data into a memory once at a first transfer rate;

firstly judging that the data amount stored in the memory has reached a first predetermined value;

reading out data from the memory at a second transfer rate higher than the first transfer rate when it is judged at the first judging step that the data amount stored in the memory has reached the first value;

secondly judging that the data amount stored in the memory has reached a second predetermined value smaller than the first predetermined value;

stopping the data read-out from the memory when it is judged at the second judging step that the data amount stored in the memory has reached the second predetermined value;

moving a write head from one of the pair of tracks to which data has been written to the other one while the data read-out from the memory is being stopped; and

stopping the write head from writing while the data read-out from the memory is being stopped.

17. A reproducing method in which data is read from a disc having formed

thereon a pair of concentric or spiral tracks adjacent to each other and to which a common address is given, comprising:

reading data from the disc;

storing the data read out from the disc into a memory once at a first transfer rate;

detecting when the data amount stored in the memory has exceeded a first predetermined value and reading out data from the memory at a second transfer rate slower than the first transfer rate;

stopping the data storage into the memory when the data amount stored in the memory has reached a second predetermined value larger than the first predetermined value; and

moving, while the data storage into the memory is being stopped, the read head from one of the pair of tracks from which the data has been read to the other one of the pair of tracks.

ABSTRACT OF THE DISCLOSURE

A reproducing apparatus for reading, or a recording apparatus for writing, data from or to a disc having pre-formed thereon a pair of concentrical or spiral tracks adjacent to each other and to which a common address is given, is adapted to control the time at which a read or write head is moved from one to the other of the pair of tracks or vice versa.

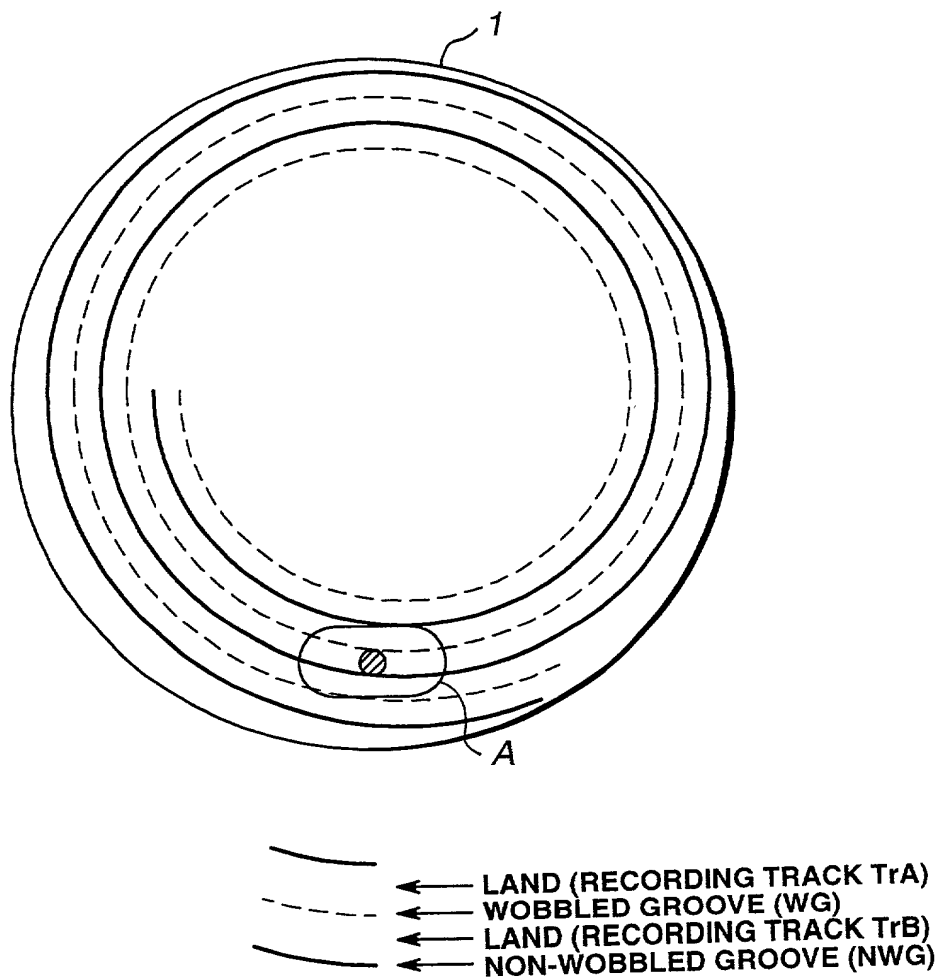


FIG.1

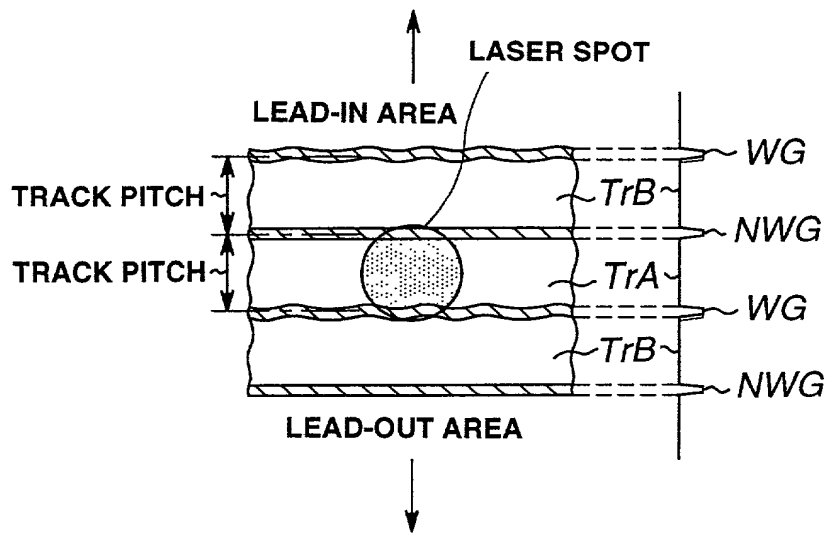


FIG.2

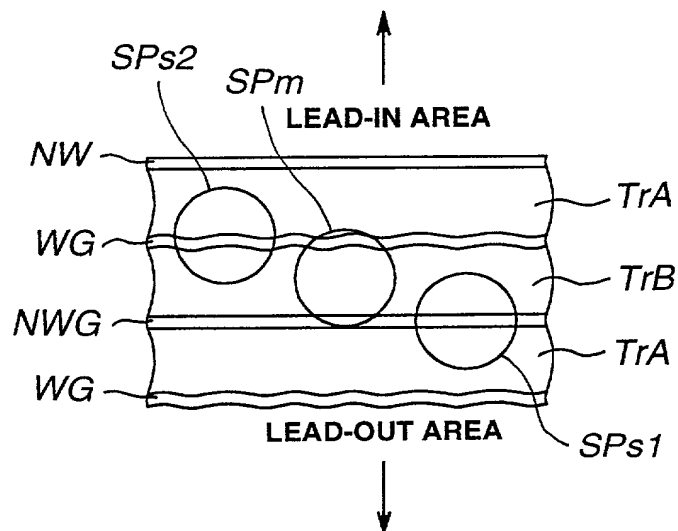


FIG.3

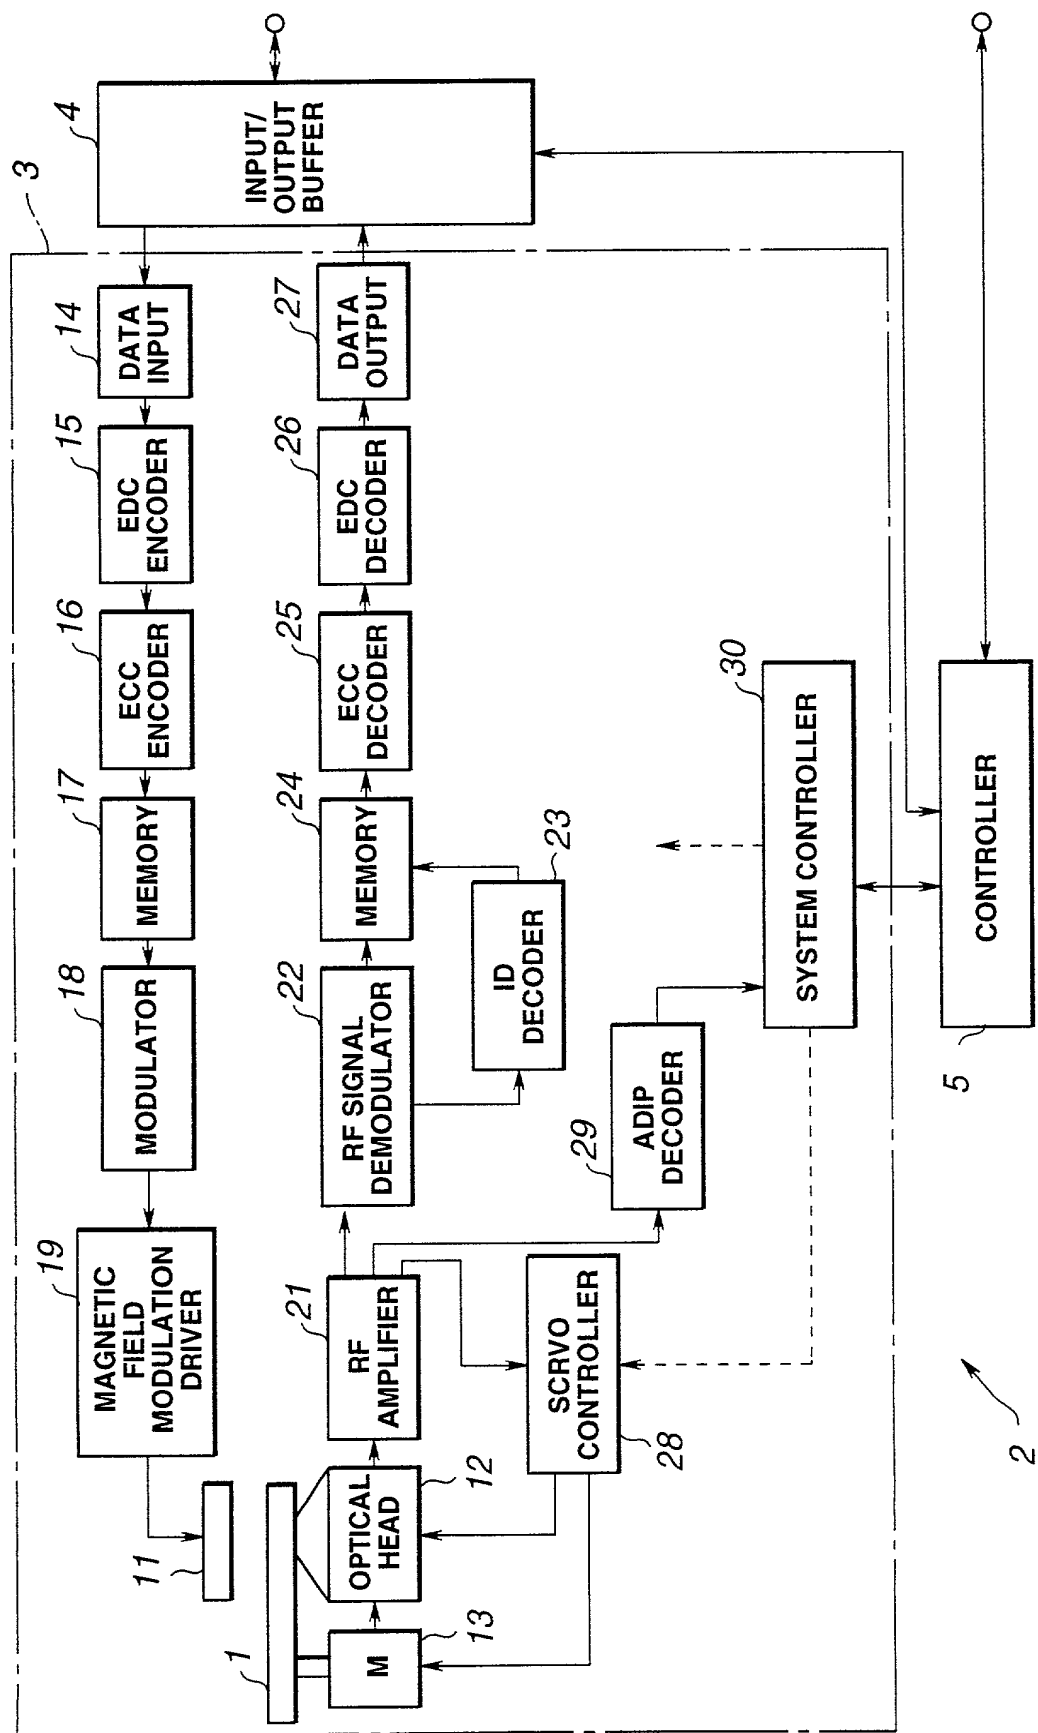


FIG.4

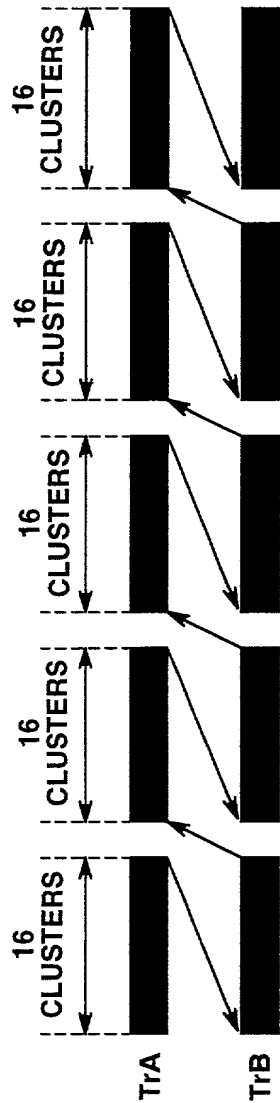


FIG. 5

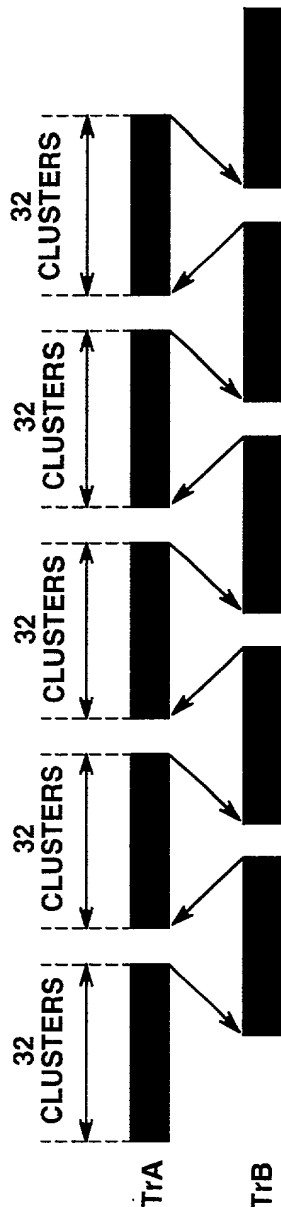


FIG. 7

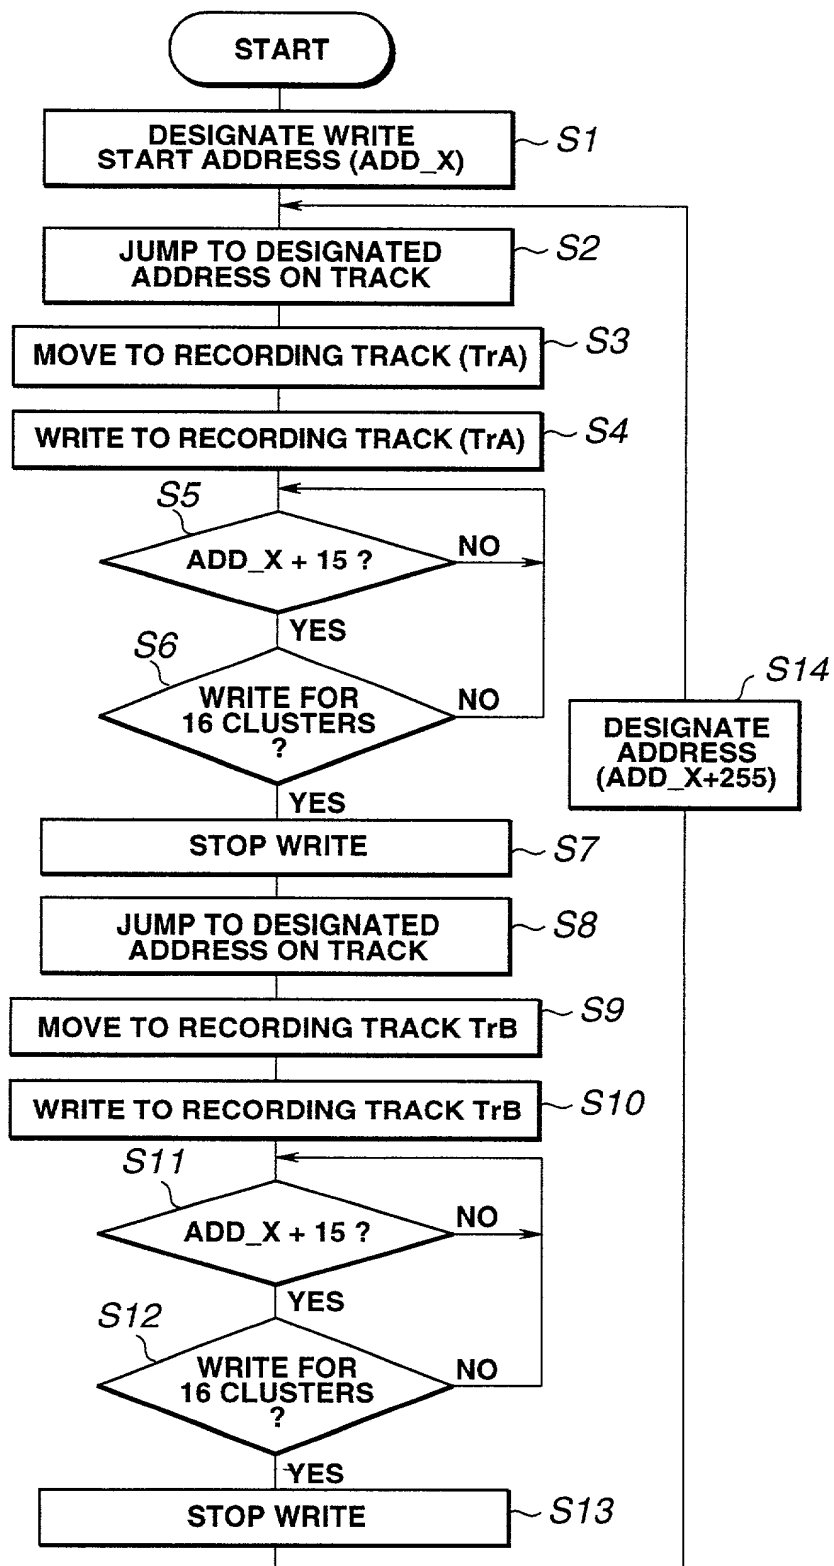


FIG.6

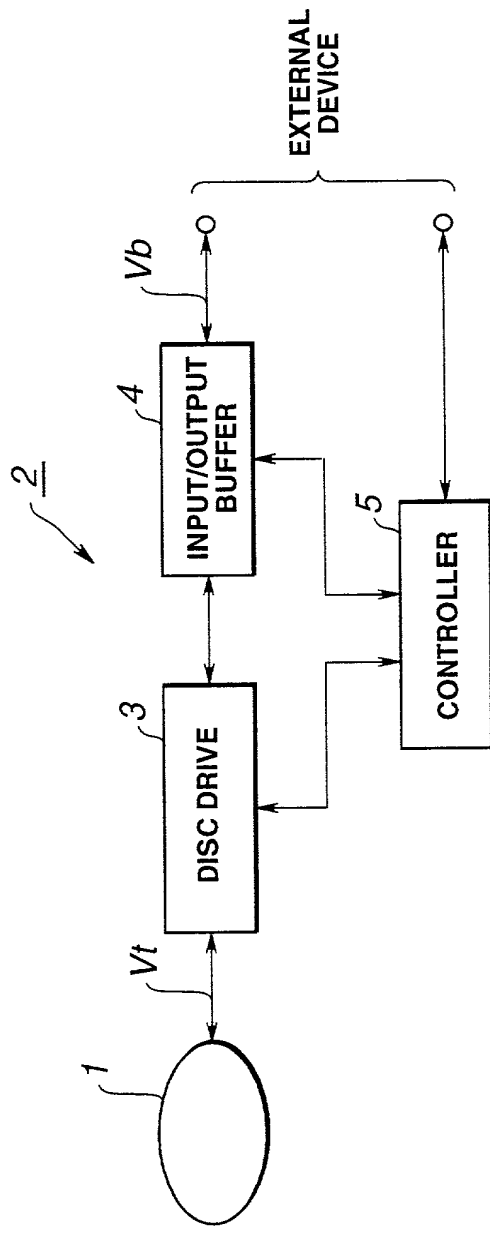


FIG.8

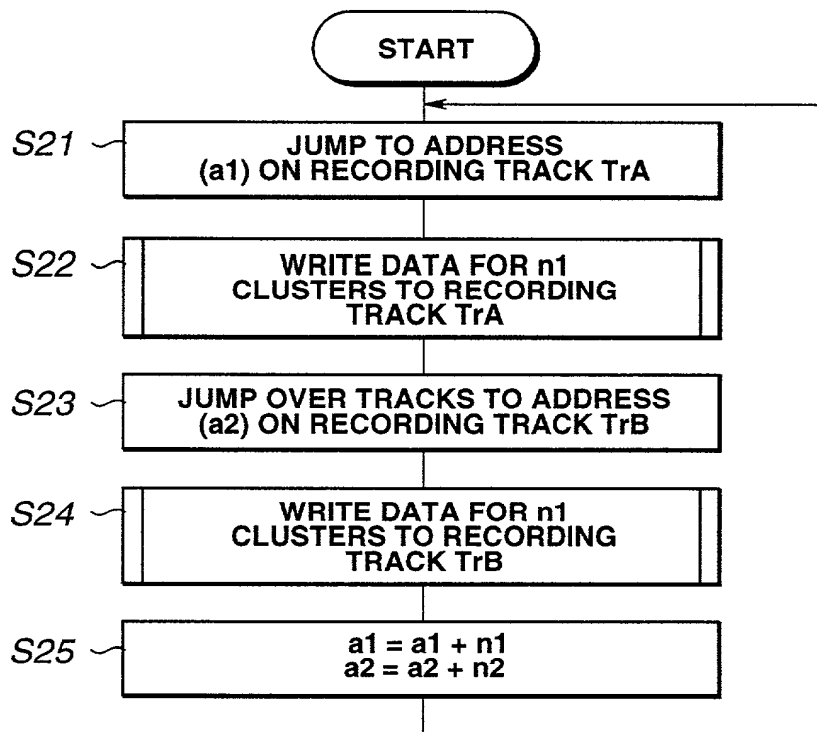


FIG.9

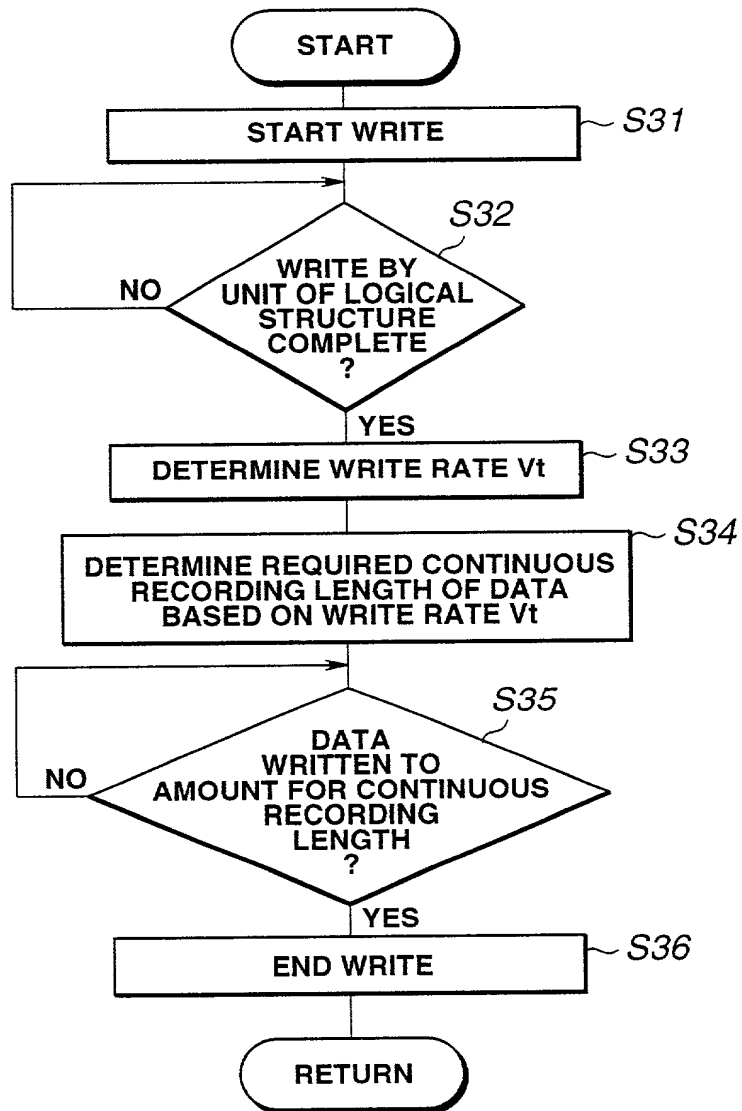


FIG.10

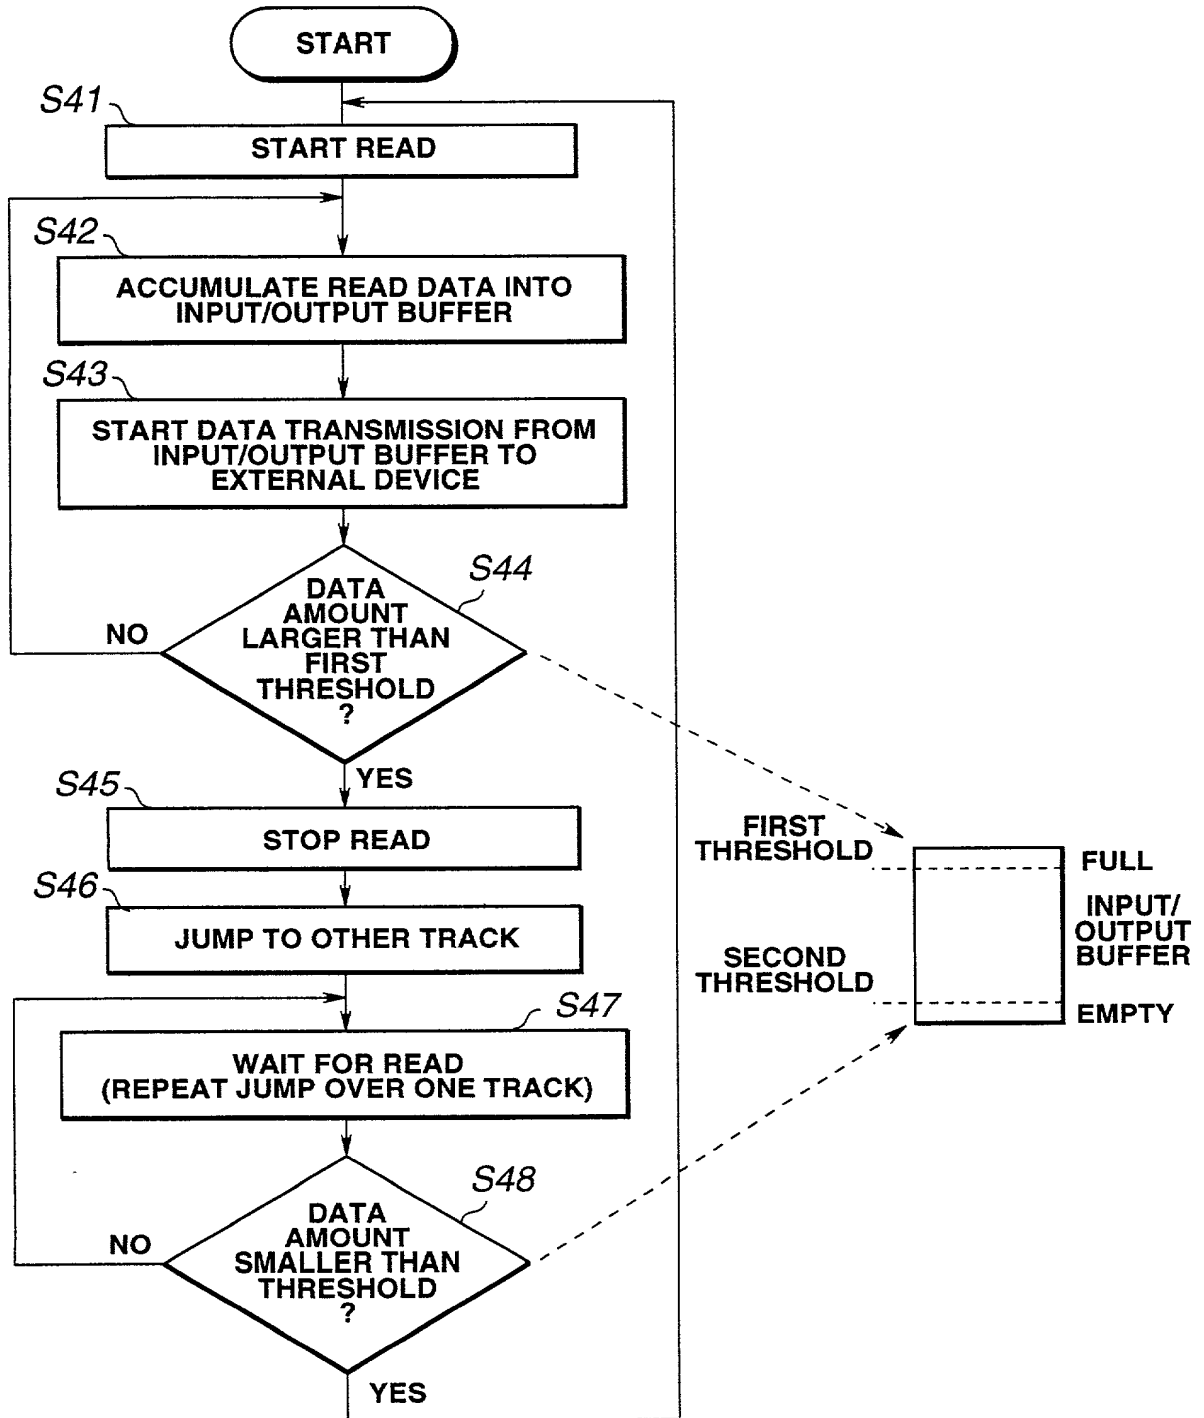


FIG.11

BY EXPRESS MAIL NO. EL151574584US

SONY-P9488

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。	As a below named inventor, I hereby declare that:
私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。	My residence, post office address and citizenship are as stated next to my name.
下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。 	I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled. RECORDING APPARATUS AND METHOD, AND REPRODUCING APPARATUS AND METHOD
上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、 <input type="checkbox"/> 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、 （該当する場合） _____ に訂正されました。	the specification of which is attached hereto unless the following box is checked: <input type="checkbox"/> was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).
私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。	I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.
私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。	I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.
Prior Foreign Application(s) 外国での先行出願 P10-124915 (Number) (番号)	Priority Not Claimed 優先権主張なし 7 May 1998 (Day/Month/Year Filed) (出願年月日)

Japanese Language Declaration

日本語宣言書

P10-124920

(Number)

(番号)

Japan

(Country)

(国名)

7 May 1998

(Day/Month/Year Filed)

(出願年月日)

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出題番号)

(Filing Date)

(出題目)

(Application No.)

(出題番号)

(Filing Date)

(出題目)

私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)

(出題番号)

(Filing Date)

(出題日)

(Status: Patented, Pending, Abandoned)

(現況：特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出題日)

(Status: Patented, Pending, Abandoned)

(現況：特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣誓書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may be jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

日本語宣言書

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁理士、または代理人の氏名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith (*list name and registration number*)

Karl A. Limbach	18,689	Mark A. Dalla Valle	34,147	Kyla L. Harriel	41,816
George C. Limbach	19,305	Charles P. Sammut	28,901	Mayumi Maeda	40,075
John K. Uilkema	20,282	Mark C. Pickering	36,239	Kent J. Tobin	39,496
Neil A. Smith	25,441	Patricia Coleman James	37,155	Michael R. Ward	38,651
Veronica C. Devitt	29,375	Kathleen A. Frost	37,326	Steven M. Santisi	40,157
Ronald L. Yin	27,607	Alan S. Hodes	38,185	Roger S. Sampson	44,314
Gerald T. Sekimura	30,103	Alan A. Limbach	39,749	Charles L. Hamilton	42,624
Michael A. Stallman	29,444	Douglas C. Limbach	35,249	Andrew V. Smith	43,132
Philip A. Girard	28,848	Brian J. Keating	39,520	Heath W. Hoglund	41,076
Michael J. Pollock	29,098	Seong-Kun Oh*		William G. Goldman	42,590
Stephen M. Everett	30,050	Cameron A. King	41,897	J. Thomas McCarthy	22,420
Alfred A. Equitz	30,922			* Recognition under 37 CFR 10.9(b)	

書類送付先

Send Correspondence to:

Charles P. Sammut, Esq.
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111-4262

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: (*name and telephone number*)

Charles P. Sammut
(415) 433-4150

唯一または第一発明者名

Full name of sole or first inventor:

CHIAKI NONAKA

発明者の署名

日付

Inventor's signature

Date

住所

Residence

Kanagawa, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

c/o SONY CORPORATION
 7-35, Kitashinagawa 6-chome
 Shinagawa-ku, Tokyo, 141-0001 JAPAN

Japanese Language Declaration 日本語宣言書	
第二共同発明者	Full name of second joint inventor, if any SEIJI OHBI
第二共同発明者 日付	Second inventor's signature Date
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN
第三共同発明者	Full name of third joint inventor, if any MAKOTO YAMADA
第三共同発明者 日付	Third inventor's signature Date
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN
第四共同発明者	Full name of fourth joint inventor, if any MASAHIRO SHIGENOBU
第四共同発明者 日付	Fourth inventor's signature Date
住所	Residence Kanagawa, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN